


# Industrial Line Mat

ANTI-FATIGUE MATTING | 1/2" DIAMOND EMBOSSED



## Our Industrial Line Mat provides comfort and performance.

An engineering marvel, Industrial Line's vinyl-nitrile wear layer is polymetrically bonded adhesive-free to a resilient and supportive foam cushion. Its smooth yet supple wear layer is easy to clean, while the expanded foam sponge reduces stress on legs and joints for added comfort and performance.

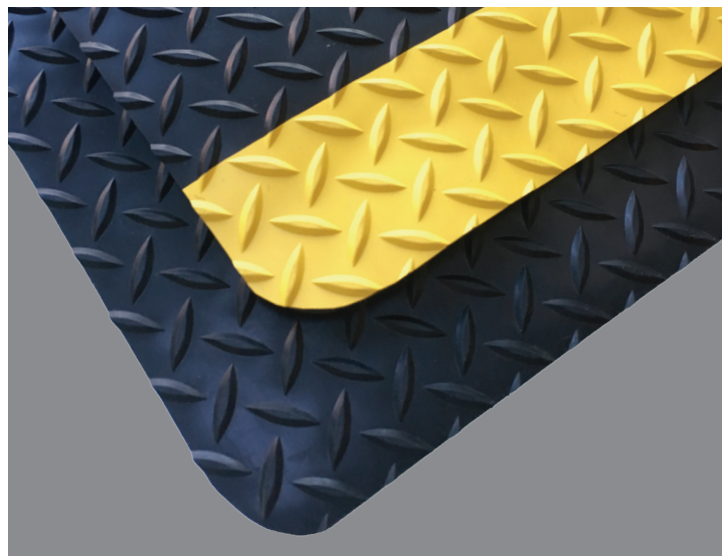

**Langhorn**  
Flooring Concepts Inc.

Your Source for  
Commercial Fitness Flooring  
(707) 823-4455 • [www.langhornfci.com](http://www.langhornfci.com)

MADE IN THE  
**USA**

indoor only

## SUGGESTED USES

Construction:	Fusion-bonded Composite
Surface Aspect:	Diamond-patterned Vinyl
Cushioning:	Closed-cell PVC Foam
Overall Gauge ( $\pm 0.050''$ ):	$\sim 1/2''$
Wear Layer Gauge ( $\pm 0.10''$ ):	$\sim 1/8''$
Foam Cushion Density:	$\sim 20$ lbs/cu. ft.
Total Weight:	$\sim 1.5$ lbs/sq. ft.

## LIMITED WARRANTY

Full Commercial Warranty	1 year
Summary of Warranty	

Products must be professionally installed to validate the warranty. Langhorn Flooring Concepts Inc. (LFCI ) warrants Bubble Mat Anti-Fatigue Mat against wear for a period of 5 years in a commercial application. This warranty applies only to material that is properly installed and maintained, while being used as intended and recommended. If the defect is covered by this warranty and is reported to LFCI within the Warranty period, LFCI will supply new material of same or similar grade to repair or replace the defective material.

- **Wear**  
Defined as complete removal of wear layer, pattern and color due to wear from normal traffic and maintenance. If the wear occurs within 5 years from date of purchase, LFCI will provide replacement materials or repair, of only the effected area.
- **Manufacturing Defects**  
LFCI warrants Bubble Mat Anti-Fatigue Mat materials are free from manufacturing defects and will replace defective floor covering and reasonable installation costs for a period of up to one [1] year from date of purchase. LFCI will not pay labor costs to repair or replace materials that defects were apparent before or at the time of installation.
- **Other Limitations**
  - This warranty is non-transferable
  - Manufacturing defect must be reported within 3 months from date of purchase.
  - This Warranty covers only properly installed & maintained floors
  - LFCI excluded and will not pay for any consequential or incidental expenses.
  - LFCI reserves the right of final judgment and may refuse claims in certain instances.

\*For a copy of the full warranty please ask for a warranty sheet

## TECHNICAL SPECIFICATIONS

Tensile Strength (ASTM D412):	1200 lbs/sq. in. minimum
Graves Tear Strength (ASTM D1004):	150 lbs.
Elongation (ASTM D412):	200% Longitudinal
Abrasion Resistance:	< 1% Loss
Hardness (ASTM D2240):	80 ± 5 (Shore 'A')
	6 months aging (negligible Δ)
Compression:	12 Max
Static Coefficient of Friction:	0.78 (Dry)

## FLAMMABILITY

Flame Resistance (FMVSS 302)	Pass
------------------------------	------

## MAINTENANCE

Diamond Plate Safety Step can be mopped or wiped clean with a damp cloth.

## IMPORTANT NOTICE

Sample swatches have been cut from an overall design; decoration and shade may vary.

NOTES:

[illegible]

YOUR AUTHORIZED SALES REPRESENTATIVE:

LFC\_INDUSTRIAL\_103019