


Natures Edge

LUXURY VINYL PLANKS | RUSTIQUE 20MIL | 4" X 36"



These luxurious and low maintenance planks offer the visual beauty of wood with the superior durability of solid vinyl.

Natures Edge Luxury Vinyl is produced with pure ingredients with the latest manufacturing technology. They are constructed with a triple vinyl lamination with a strong vinyl backing, a vinyl print layer and a tough, durable wear layer. Nature's Edge has the look and the texture of natural wood while providing an easy to install, easy to maintain and clean floor system.

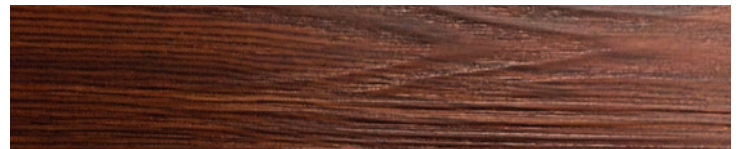

01. Henna Oak NV1010



02. Pure Oak NV1012



03. Honey Oak NV1018



04. Light Oak NV1119

Natures Edge

LUXURY VINYL PLANKS | RUSTIQUE 20MIL | 4" X 36"



SUGGESTED USES

Beauty Salons, Conference Rooms, Corporate Lunchrooms, General Office, Hospitals, Libraries, Pharmacies, Retail/Department Stores, Resorts, Restaurants, Spas and Supermarkets

Manufacturing Standard: Class III Printed Film Vinyl Plank;
1x Coated Registered Embossed Surface*

Overall Thickness 3.0mm | 0.120"
Wear Layer Thickness 0.5mm | 20mil
Plank Size 4" x 36"

LIMITED WARRANTY

Full Commercial Warranty 16 years

Summary of Warranty:

Natures Edge planks must be professionally installed to validate the warranty. Langhorn Flooring Concepts Inc. warrants Natures Edge Style Rustique first quality planks against wear for a period of 21 years in a commercial application. This warranty applies only to material that is properly installed and maintained, while being used as intended and recommended. If the defect is covered by this warranty and is reported to Langhorn Flooring Concepts Inc. within the Warranty period, Langhorn Flooring Concepts Inc. will supply new material of same or similar grade to repair or replace the defective material.

Wear

Defined as complete removal of wear layer, pattern and color due to wear from normal traffic and maintenance. If the wear occurs within 21 years from date of purchase, Langhorn Flooring Concepts Inc. will provide replacement materials or repair, of only the effected area.

Manufacturing Defects

Langhorn Flooring Concepts Inc. warrants Style Rustique first quality plank materials are free from manufacturing defects and will replace defective floor covering and reasonable installation costs for a period of up to one [1] year from date of purchase. Langhorn Flooring Concepts Inc. will not pay labor costs to repair or replace materials that defects were apparent before or at the time of installation.

Other Limitations

- This warranty is non-transferable
- Manufacturing defect must be reported within 3 months from date of purchase.
- This Warranty covers only properly installed & maintained floors
- Langhorn Flooring Concepts Inc. excluded and will not pay for any consequential or incidental expenses.
- Langhorn Flooring Concepts Inc. reserves the right of final judgment and may refuse claims in certain instances.

*For a copy of the full warranty please ask for a warranty sheet

PACKING & DIMENSIONS

Plank 4" x 36": 30 planks/carton
Sq. Ft. per carton: 30 sq. ft
Weight: 29.76 lbs./carton

TECHNICAL SPECIFICATIONS (ASTM 1700-99)

Stability (EN 986)	Pass
Abrasion Resistance (EN 660)	Excellent (<0.15g/1000 cycles)
Static Load (ASTM F970 - Modified)	2000 psi
Sound Insulation (DIN 52210)	4dB
Slip Resistance (ASTM D 2047)	Pass (0.61 - Exceeds ADA Standards)
Stain & Chemical Resistance (ASTM 925)	Pass
Light Resistance (F 1515)	Pass
Indentation Resistance (F 1914)	Pass (<8%)

FLAMMABILITY RATING

Radiant Panel Test (ASTM E648)	Class 1
Smoke Density (ASTM E662)	Pass (<450 sdi)
Heat Stability (ASTM 1514)	Pass(Excellent)
HUD/FHA Requirements	Exceeds

IMPORTANT NOTICE

Sample swatches have been cut from an overall design, decoration & shade may vary. The random nature of wood and other natural materials from which our patterns are designed means that significant color and design variation is normal and enhances the look of the planks.

PRODUCT CONSTRUCTION



1x Coating
Excellent stain, abrasion and fade resistance with anti-bacterial properties. Easy to maintain and no need to wax. ASTM D4060 rating 75,000 cycles.



Transparent 40mil Wear Layer
Extremely durable, high-purity vinyl wear layer used on our 6", 7", and 18" vinyl planks and tiles for superior performance in heavy commercial traffic spaces.




Registered Embossing
With registered embossing, each tile or plank has a natural look and feel.



Printed Layer
Realistic design gives each tile or plank its pattern and color. Designed to give a three dimensional appearance.



Vinyl Backing & Extruded Vinyl Core Layers
High-performance vinyl backing ensures dimensional stability, durability and rigidity. ASTM F970 rating of 2,000psi.



MAINTENANCE

We recommend using a non-rising cleaner that leaves no film and suggest that you vacuum, sweep or dust mop twice per week. High-traffic areas might require more frequent cleaning.

Wipe up food and other spills immediately using recommended cleaner and a soft cloth. You should NEVER USE ABRASIVE CLEANERS, POWDERS, OIL CLEANERS, WAXES OR DISH DETERGENT. These will scratch the surface or leave a film.

When using a vacuum, if possible turn off the beater and use a hose or wand with an upholstery attachment. Vacuum wheel may also be a source for indenting and scuffing, check the wheels for embedded grit.

To remove scuff marks you can use a soft cloth to rub it out. If they difficult to remove try using a product named "Oops Painter Wipes". Rinse the area well afterwards with clean warm water and allow to dry. Please note that these procedures may help remove stains from vinyl floors, but cannot guarantee complete removal. Burns, holes or "permanent" stains may require a replacement "patch of that section of the floor.

To remove damaged planks you can use a hair dryer, which heats up the adhesive allowing the plank to be picked up. When the plank is up, use a wide blade putty knife and pull it out, then put the new plank down once the surface has been prepared. You should NEVER USE A HEAT GUN as this emits too much heat and will damage the planks.

YOUR AUTHORIZED SALES REPRESENTATIVE:

LFC_NER20_4X36_100821