

# Super Vinyl & LP


GRID ENTRY | REGULAR QUIET VINYL



Super Vinyl & LP's ingenious close-space design of the open grid bars also allows the product to be heel-proof and suitable for wheel chairs.

Well proven as the ideal first barrier to prevent dirt entering buildings, Super Vinyl's ingenious combination of an abrasive 'diamond' tread surface with an open grid system effectively prohibits dirt from being trodden inside a building. This efficient, high quality, clean-and-scrape system protects internal floor coverings and significantly reduces cleaning costs.

- Super Vinyl is made from a hard-wearing, flexible PVC
- Wheeled-traffic friendly including shopping trolleys
- Open grid design lets debris fall through
- Well proven as the ideal first barrier to prevent dirt entering buildings

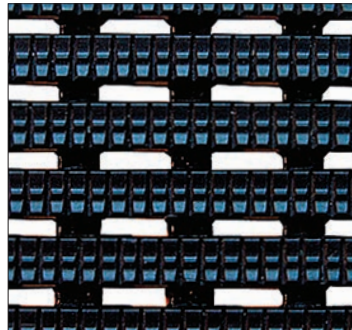

01. Black



02. Brown



03. Silver LP



04. Grey

# Super Vinyl & LP

GRID ENTRY | REGULAR QUIET VINYL



## SUGGESTED USES (Super Vinyl & LP)

Indoor or outdoor entryways or other high-traffic areas. Ideal for vestibules.

## SPECIFICATIONS (Super Vinyl)

Composition: Flexible PVC  
Overall Thicknesses: Regular: 0.563" (14mm)  
Roll Widths: 4' only  
Roll Lengths: 33' (standard)

## SPECIFICATIONS (Super Vinyl LP)

Composition: Flexible PVC  
Overall Thicknesses: 0.375" (10.5mm)  
Roll Width: 4' in stock | 3' available

## Limited Warranty:

2 years - Ask for warranty sheet for details

## TECHNICAL SPECIFICATIONS

Friction: (ASTM C1028) 0.54 (Wet), 0.66 (Dry)  
DIN 51130: R11, V10  
UV Resistance (BS EN 607): Δ E 1.02 (Uncolored Material)  
Thermal Ratings: ≥ -23°C, ≤ +60°C  
Fire Resistance (ASTM E648): Class I  
Flame Retardant Grade (EN ISO 13501-1:2007-Cfl) S1  
Uncolored PVC material: BS EN 607 = Delta E 1.02

## ENVIRONMENT

Langhorn Flooring Concepts does not use any substances currently included in the SVHC (Substances of Very High Concern) list under REACH (Registration, Evaluation, Authorization and Restriction of Chemical substances) in any matting products. All PVC grid products are 100% recyclable.

## LEED-NC:

MR Credit 4 | IEQ Credit 5

(Black: 100% pre-consumer recycled; Gray: 32% pre-consumer recycled)

## MAINTENANCE

### Daily:

Vacuum with an industrial cleaner. Should stones, salt particles or other solid matter become embedded between the surface ribs, remove using a blunt instrument (screwdriver) or similar device. In addition to daily routine above, its important to remove chewing gum deposits and stains as they appear.

### Weekly:

Complete daily cleaning routine, then clean top surface using cylindrical brush machine. Initially work in direction of top ribs then across the ribs to complete cleaning. If a cylindrical brush machine is not available equally good results can be achieved using a high-pressure water extraction process.

### Recessed Well Cleaning (as needed):

Carefully lift and remove each section of grid matting one at a time.

Once all of the Super Vinyl sections have been removed vacuum/sweep the recess thoroughly, ensuring to pick up all stones or grit particles. Replace the matting sections as originally laid working from the edges to the center of the installation. When installing the sections at the edge of the frame, be sure to slide them under the frame lips.

## THERMAL

Functional ≥ -23°C + ≥ +60°C (slight size variation may occur at temperature extremes).

## INSTALLATION

Preparation: Ensure recessed well is at a depth of 10mm from the finished floor level. It should have a level and sound base, free from any obstructions. Before commencing installation, visually check the recess and remove any lumps or ridges in the base that may be present. Vacuum and/or sweep recess.

It is recommended that the entrance flooring system be installed as one of the final jobs to avoid damage associated with general building works. Unpack and inspect all materials to ensure they are free from transport damage. Check all components and tools required are available. Unroll/unpack the sections of matting and lay in a clean dry protected area to acclimatise and relax. Depending on duration of storage and ambient temperature, this process may take up to 24 hours. A heat gun can be used to aid relaxation of matting. When handling the rolls or large panels of matting at any time during the installation, avoid dragging or rough handling that may cause stretching or distortion.

Tools Required: Aluminum sections (5 types, supplied as required); screws, screw anchors and shears for trimming mat; a powered drill with size 5.5mm masonry drill bit, hacksaw, utility knife and straight edge; a hot air gun may facilitate installation in cold ambient temperatures.

Cut matting using a utility knife and a straight edge. In cold ambient temperatures warm matting with hot air gun to facilitate cutting.

## NOTE:

Due to the elastic nature of the product, it is important to avoid rough handling during installation.

## IMPORTANT NOTICE

For more information please contact your Langhorn Flooring Concepts sales representative or customer service toll-free at +1 866 284 6287.

YOUR AUTHORIZED SALES REPRESENTATIVE:



A DIVISION OF VAN GELDEREN INC.  
**Langhorn**  
Flooring Concepts